



Specialist paints, primers and coatings



Cleaning, priming and repair.



Interior decoration and protection.



Exterior protection and security.



a tradition of excellence, since 1894

“At Blackfriar we understand the importance of doing a professional job and this is reflected in the quality of our products. In Blackfriar Professional we’re confident we’ve created a range of products that will deliver exceptional, lasting results you can be proud of.”



#### Primers, cleaners and repair compounds

Degreaser and cleaner, 5.  
Acid etch, 6.  
Low-temperature concrete repair mortar, 9.  
Concrete repair mortar, 10.  
Floor sealer, 12.  
Water based floor sealer, 15.  
Damp proof primer, 16.  
Oil tolerant primer, 19.  
Epoxy floor primer, 20.

#### Floor paints and coating systems

Polyurethane floor paint, 22.  
Acrylic floor paint, 25.  
Anti-slip floor paint, 26.  
Epoxy floor paint, 29.  
Solvent-free epoxy floor paint, 30.  
Line-marking paint, 33.

#### Building protection and security

Solar reflective paint, 34.  
Anti-climb paint, 37.  
Anti-graffiti lacquer, 38.  
Graffiti remover gel, 38.



# Degreaser & Cleaner

## Overview

A concentrated, heavy duty, degreaser and cleaner that removes impacted oil and grease from floors and other cementitious surfaces prior to etching. An essential part of the cleaning process and highly recommended for achieving the best possible finish.

## Key features & benefits

- Powerful cleaning action for oil and grease contamination.
- Suitable for concrete and screed floors.
- Indoor and outdoor use.

## Application

Lint free cloth.

## Pack size

2.5 litre.

## Colour



Clear  
Liquid





# Acid Etch

## Overview

A preparation solution for use on concrete and screed floors prior to sealing, coating or painting. Removes excess lime dust (laitence) which can interfere with the adhesion of floor coatings.

## Key features & benefits

- Etches power floated, very smooth, hard or chemically treated concrete floors to key the surface and improve the adhesion of floor coatings.

## Application

Stiff bristled yard brush or squeegee mop.

## Pack size

5 litre.

## Coverage

Up to 7m<sup>2</sup> per litre.







## Low Temperature

# Concrete Repair Mortar

### Overview

A high performance, two-pack, repair mortar for damaged and eroded concrete, masonry and brick surfaces within cold storage areas.

### Key features & benefits

- Ideal for filling cracks, holes and large voids.
- Resists common chemical spillages including petrol, dilute acids, caustic soda and mineral oils.
- Cures at -10°C
- Suitable for brick, masonry and concrete surfaces.

### Application

Trowel.

### Pack size

5kg.

### Colours

Product has a natural grey appearance (see photograph, left).

### Finish

Smooth, slightly textured finish.

### Drying time

10 hours at 10°C and 48 hours at -10°C.





# Concrete Repair Mortar

## Overview

A two-pack, high performance, quick hardening repair mortar for damaged and eroded concrete, masonry and brick surfaces within heavy traffic areas.

## Key features & benefits

- Ideal for filling cracks, holes and large voids.
- Perfect for roads, ramps, car parks, driveways, pavements, loading bays and warehouse floors.
- Resists common chemical spillages including petrol, dilute acids, caustic soda and mineral oils.
- Indoor and outdoor use.

## Application

Trowel.

## Pack size

5kg.

## Colour

Product has a natural grey appearance (see photograph, right).

## Finish

Smooth, slightly textured finish.

## Drying time

Minimum of 6 hours.





# Floor Sealer

## Overview

A clear, alkyd sealer for use underneath our Anti-slip Floor Paint and Polyurethane Floor Paint on porous surfaces. Can also be used on porous brickwork underneath our Anti-Climb Paint. Aids by penetrating, binding and sealing the bare surface ready for overcoating.

## Key features & benefits

- Binds, seals and stabilises friable surfaces.
- Designed for bare / concrete floors.
- Indoor use only.

## Application

Brush or roller.

## Pack size

5 litre.

## Colour



Clear

## Finish

Gloss.

## Coverage

10 - 15m<sup>2</sup> per litre per coat (dependent upon surface porosity).

## Drying time

16 hours at 20°C.





## Water-Based Floor Sealer

### Overview

A clear, water-borne sealer for use beneath Blackfriar Professional Acrylic Floor Paint on porous surfaces. Aids by penetrating, binding and sealing porous surfaces for overcoating.

### Key features & benefits

- Can be used as a dust proofer.
- Designed for bare / concrete floors.
- Suitable for brick, masonry and concrete surfaces.

### Application

Brush or roller.

### Pack size

5 litre.

### Colour



Clear

### Finish

Gloss.

### Coverage

10-15m<sup>2</sup> per litre per coat.

### Drying time

2-4 hours at 20°C.





# Damp Proof Primer

## Overview

A two-pack, moisture resistant membrane for priming damp concrete floors and screeds prior to coating with Blackfriar Professional Solvent-Free Epoxy Floor Paint. Works by locking in moisture, allowing earlier application of floor coatings.

## Key features & benefits

- Designed to save time - allows for earlier application of coatings when floors are damp.
- Ideal for porous concrete and screed surfaces.
- Indoor and outdoor use.

## Application

Lambswool roller.

## Pack size

5 litre.

## Colour



Clear

## Finish

Gloss.

## Coverage

Up to 4.5m<sup>2</sup> per litre per coat.

## Drying Time

6 - 16 hours at 20°C.





# Oil Tolerant Primer

## Overview

A two-pack, specialist primer for surfaces with residual oil contamination. Ideal for concrete floors and screeds, promotes adhesion prior to coating with Blackfriar Professional Solvent-Free Epoxy Floor Paint.

## Key features & benefits

- Works over all types of oil stain.
- Ideal for porous concrete floors and screeds.
- Indoor and outdoor use.

## Application

Lambswool roller.

## Pack size

5 litre.

## Colours



Clear

## Finish

Gloss.

## Coverage

Up to 5m<sup>2</sup> per litre per coat.

## Drying time

6 - 16 hours at 20°C.





# Epoxy Floor Primer

## Overview

A two-pack, water-based primer which promotes adhesion on difficult and well worn surfaces prior to applying Blackfriar Professional epoxy floor paints.

## Key features & benefits

- Use on porous concrete or previously painted floors
- Indoor and outdoor use.
- Low odour.

## Application

Brush or roller.

## Pack size

5 litre.

## Colour



Clear

## Finish

Gloss.

## Coverage

10-15m<sup>2</sup> per litre per coat (dependent upon surface porosity).

## Drying time

4-6 hours at 20°C.



# Polyurethane Floor Paint

## Overview

Protects and transforms floors with an attractive, hard wearing finish. Ideal for most surfaces including wood, concrete, cement, metal and brickwork. Specially formulated to resist oil and grease.

## Key features & benefits

- Ideal for foot and light traffic areas.
- Can be applied to previously painted surfaces.
- Indoor and outdoor use.

## Application

Brush or roller.

## Pack sizes

250ml\*, 500ml, 1 litre, 2.5 litre and 5 litre.

## Colours



## Finish

Semi-Gloss.

## Coverage

12 - 14m<sup>2</sup> per litre.

## Drying time

16 hours at 20°C between coats.

\* Tile Red only.







# Acrylic Floor Paint

## Overview

Protects and transforms floors with an attractive, hard wearing tough and durable finish. Ideal for most surfaces including wood, concrete, asphalt and tarmac in light traffic areas.

## Key features & benefits

- Low odour - ideal where paint odours present an issue.
- Suitable for previously painted surfaces.
- Water-based - quick drying.
- Indoor and outdoor use.






## Application

Brush or roller.

## Pack sizes

1 litre, 2.5 litre and 5 litre.

## Colours

				
White	Mid Grey	Black	Tile Red	Green

## Finish

Semi-Gloss.

## Coverage

10 - 12m² per litre per coat.

## Drying time

4 - 6 hours at 20°C.



# Anti-Slip Floor Paint

## Overview

A tough, durable, high opacity floor coating. Contains special aggregates for outstanding slip resistance. Suitable for concrete, masonry, tiles, wood and metal surfaces.

## Key features & benefits

- Specially formulated for foot and light traffic areas.
- Aggregated finish for total slip-resistance.
- Indoor and outdoor use.


## Application

Brush or roller.

## Pack sizes

1 litre, 2.5 litre and 5 litre.

## Colours

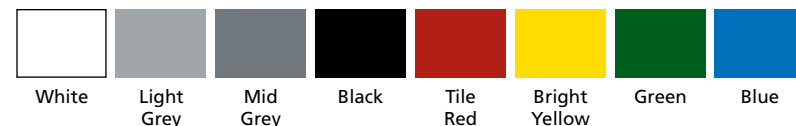

## Finish

Semi-gloss, aggregated finish.

## Coverage

6 - 10m<sup>2</sup> per litre per coat.

## Drying time

4 - 6 hours at 20°C between coats.







## Water-Based Epoxy Floor Paint

### Overview

A two-pack, exceptionally hard-wearing, low-odour heavy duty floor coating ideal for heavy traffic areas. Outstanding resistance to oil, chemicals, solvents and abrasion.

### Key features & benefits

- Designed for heavy traffic environments.
- Can be applied over existing surfaces such as wood, metal, concrete, masonry and asphalt.
- Indoor and outdoor use.








### Application

Brush or roller.

### Pack size

5 litre.

### Colours

						
White	Grey	Black	Bright Red	Tile Red	Yellow	Green

### Finish

Semi-Gloss.

### Coverage

10 - 12m² per litre per coat.

### Drying time

4 - 6 hours at 20°C.



Solvent-Free

# Epoxy Floor Paint

## Overview

A two-pack, exceptionally hard-wearing, low-odour heavy duty floor coating ideal for heavy traffic areas. Outstanding resistance to oil, chemicals, solvents and abrasion.

## Key features & benefits

- Designed for heavy traffic environments.
- Can be applied over existing surfaces such as wood, metal, concrete, masonry and asphalt.
- High build - 3x the thickness of conventional floor paints.
- Indoor and outdoor use.

## Application

Brush or roller.

## Pack size

5 litre.

## Colours



Mid  
Grey



Tile  
Red

## Finish

Semi-Gloss.

## Coverage


7-9m<sup>2</sup> per litre per coat.

## Drying time

4 -16 hours at 20°C.





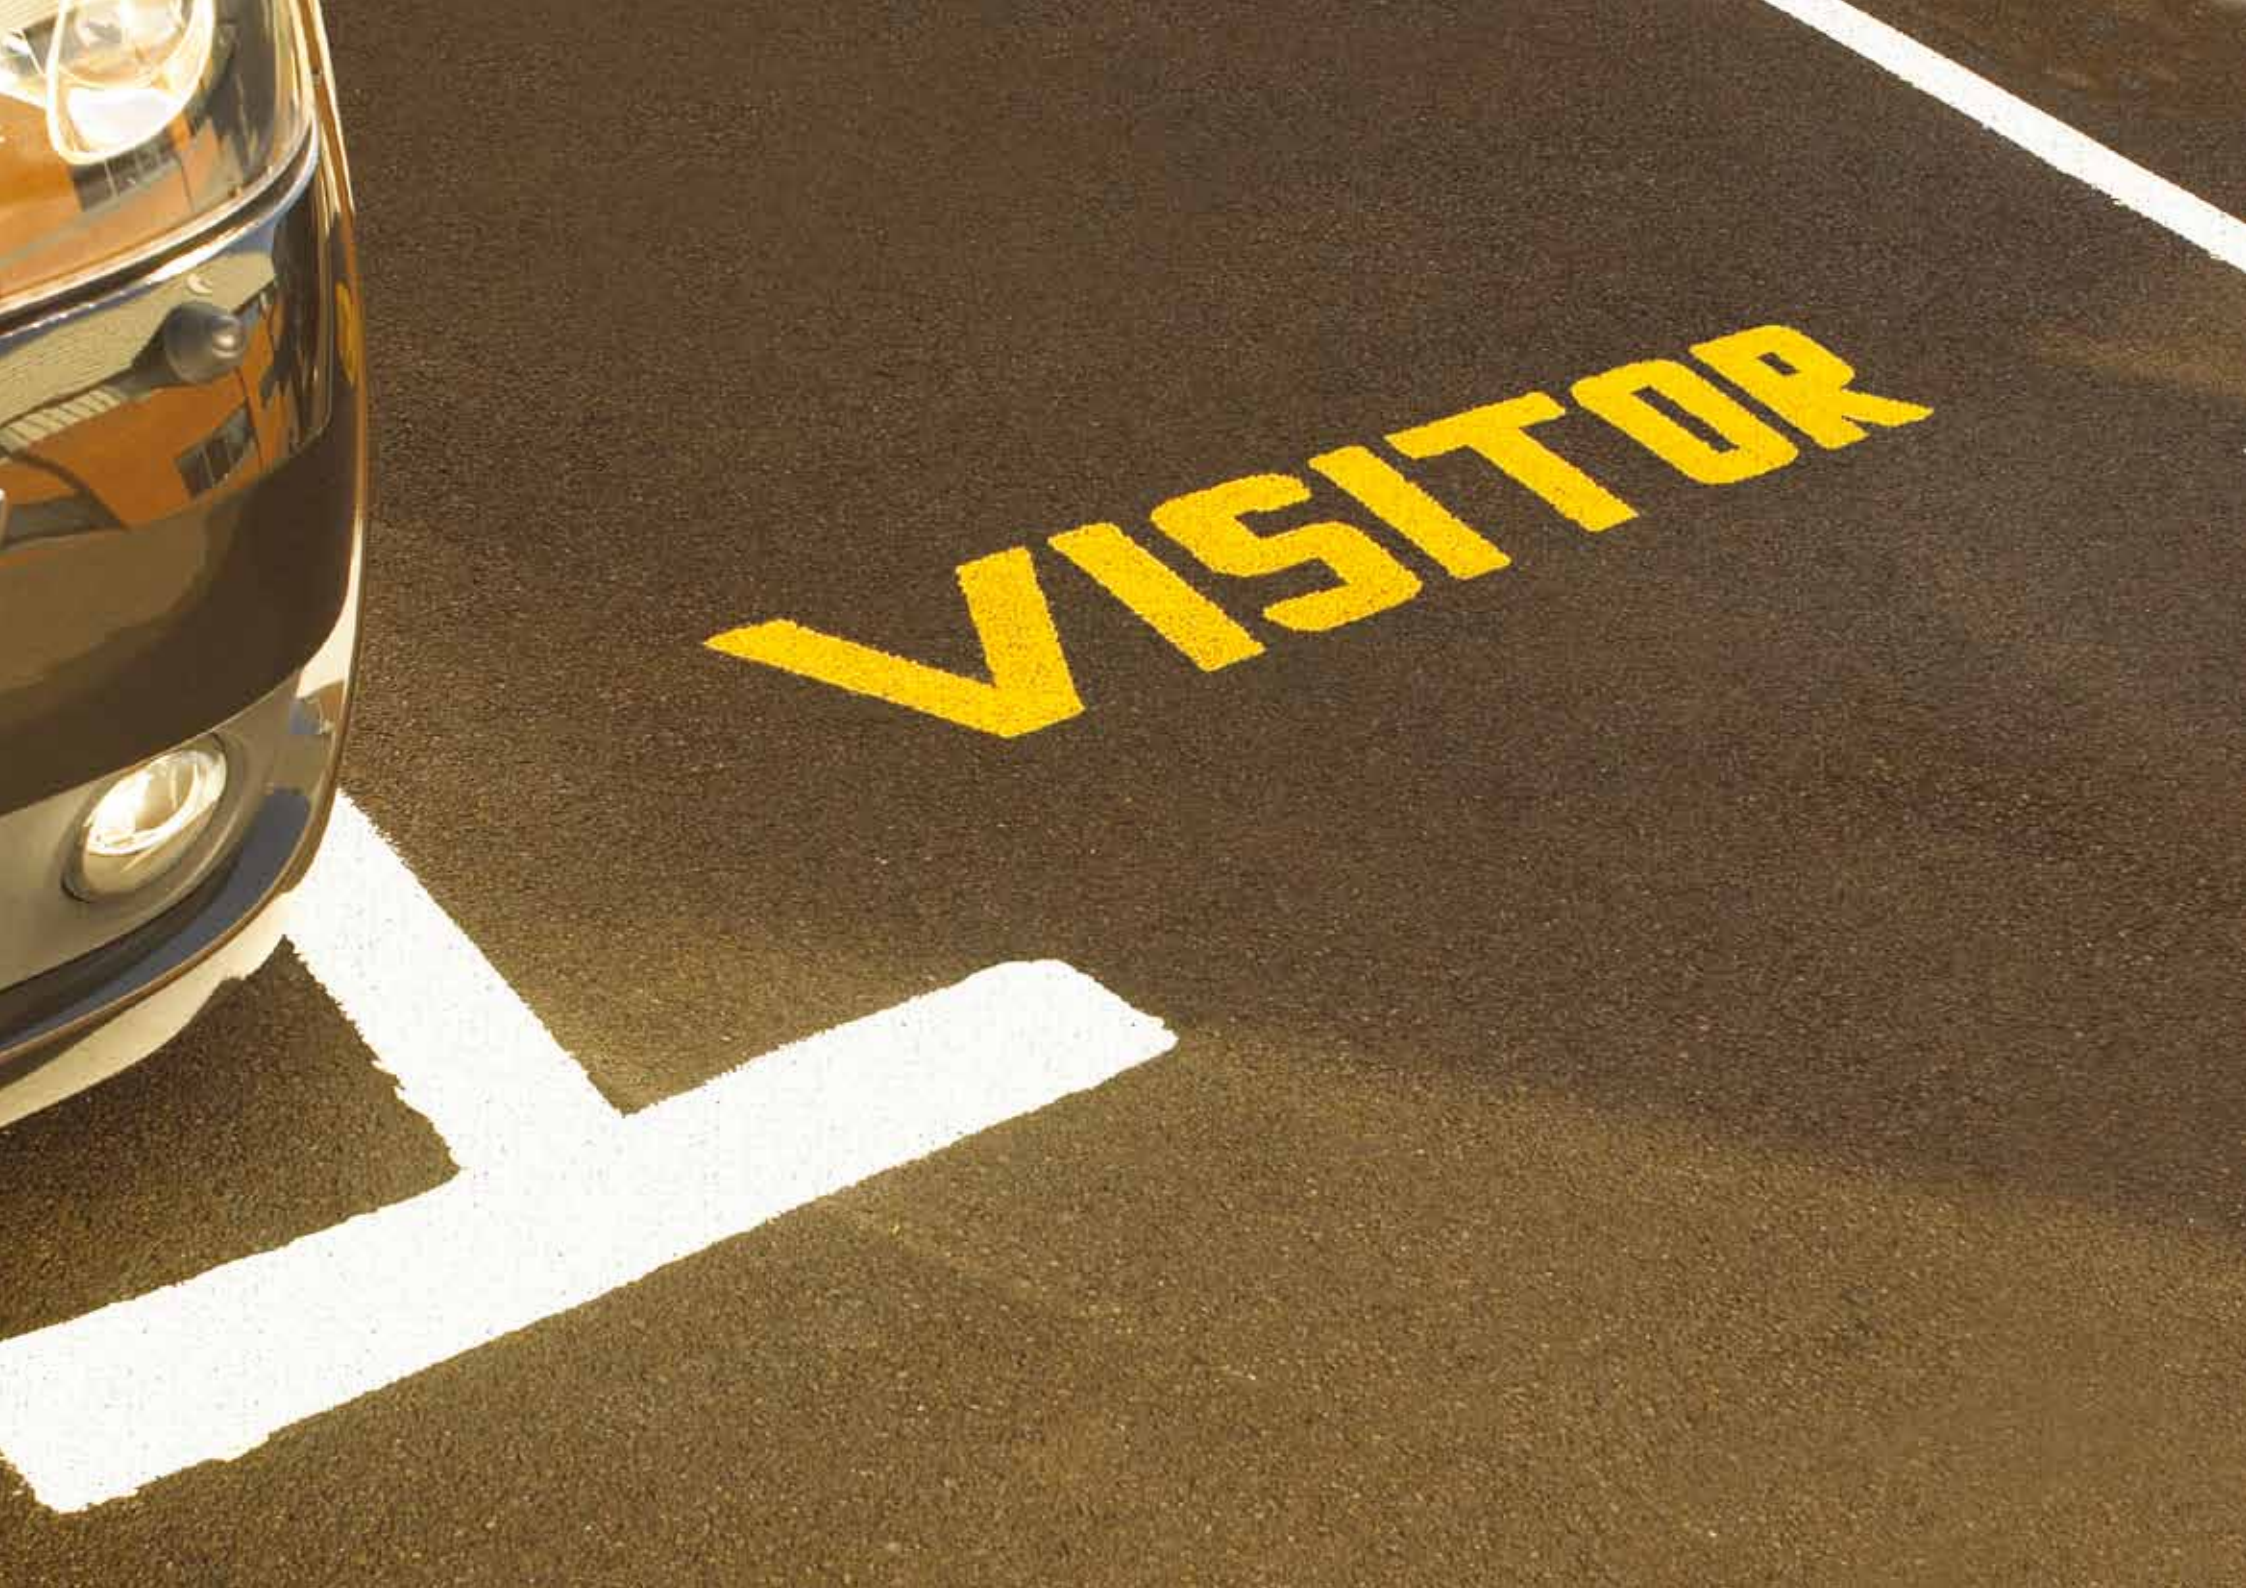

# Line-Marking Paint

## Overview

A quick drying, long-lasting marking paint for bare concrete, asphalt and painted floors. Ideal for factories, schools, car parks and public areas.

## Key features & benefits

- Gives a durable finish with excellent resistance to abrasion and harsh cleaning products.
- Indoor and outdoor use.

## Application

Brush or roller.

## Pack sizes

1 litre, 2.5 litre, 5 litre.

## Colours



White

Yellow

## Finish

Matt.

## Coverage

13m<sup>2</sup> per litre per coat.

## Drying time

30 minutes at 20°C.





# Solar Reflective Paint

## Overview

Specially formulated reflective paints designed to reduce solar heat gain on dark coloured roofs. Ideal for stable felt, bitumen, metal, concrete, brick and more. The aluminium finish is bitumen based making it most suited to weathered roof membranes while the white finish is water based making it perfect for adding solar reflectivity to new roofs.

## Key features & benefits

- Reflects sunlight and dissipates heat from the roof.
- Resists surface fungal growth.
- Self priming 2 coat system.
- Outdoor use.

## Application

Brush or roller.

## Pack size

5 litre.



Aluminium



White

## Coverage

White - 4.8m<sup>2</sup> per litre per coat.

Aluminium - 1m<sup>2</sup> per litre per coat.

## Drying time

White - 2 - 4 hours at 20°C.

Aluminium - 16 - 24 hours at 20°C.





# Anti-Climb Paint

## Overview

A thick, non-drying coating for parapets, ledges, down comers, pipes, gutters, window sills, fencing and walls. Deters potential intruders by making surfaces virtually unclimbable, whilst marking hands and clothing.

## Key features & benefits

- Slippery, non-drying finish.
- Can be applied to brickwork, concrete, plastic, metal or wood.

## Application

Brush or painting mitt.

## Pack sizes

1, litre, 2.5 litre, 5 litre.

## Colours



## Finish

Semi-Matt.

## Coverage

2m<sup>2</sup> per litre.

## Drying time

Non-drying.





# Anti-Graffiti Lacquer

## Overview

A high-performance, two-pack, clear anti-graffiti coating for external surfaces. Provides an outstanding permanent (non-sacrificial) and easily cleaned protective surface. Graffiti is removed with Blackfriar Professional Graffiti Remover Gel (sold separately in 1 litre size).

## Key features & benefits

- Allows for easy removal of permanent marker, aerosol and conventional paints.
- For use on all types of external surface including wood, brick, concrete and natural stone.
- Clear, hardwearing solvent-borne lacquer.
- Two pack, non-sacrificial coating.

## Application

Brush or roller.

## Pack size

Anti-Graffiti Lacquer - 5 litre.

Graffiti Remover Gel - 1 litre.

## Colour



Clear

## Coverage

10-12m<sup>2</sup> per litre per coat.

## Finish

Satin.

## Drying time

8 hours at 20°C.







*PROFESSIONAL*

Blackfriar Paints,  
Portobello Industrial Estate,  
Birtley,  
Chester-le-Street,  
County Durham,  
DH3 2RE.

T: +44 (0)191 411 3146

F: +44 (0)191 411 3147

E: [blackfriar@tor-coatings.com](mailto:blackfriar@tor-coatings.com)

[blackfriar.co.uk](http://blackfriar.co.uk)